

# HYUNDAI SOLAR MODULE

**VG**  
SERIES

**PERC Shingled**

HiE-S390VG HiE-S395VG HiE-S400VG



Shingled  
Technology



For Both  
Residential &  
Commercial  
Applications



More Power  
Generation  
In Low Light



**M6 PERC Shingled**

M6 PERC Shingled Technology provides ultra-high efficiency with better performance in low irradiation. Maximizes installation capacity in limited space.



**Anti-LID / PID**

Both LID(Light Induced Degradation) and PID(Potential Induced Degradation) are strictly eliminated to ensure higher actual yield during lifetime.



**Mechanical Strength**

Tempered glass and reinforced frame design withstand rigorous weather conditions such as heavy snow and strong wind.



**Reliable Warranty**

Global brand with powerful financial strength provide reliable 25-year warranty.



**Corrosion Resistant**

Various tests under harsh environmental conditions such as ammonia and salt-mist passed.



**UL / VDE Test Labs**

Hyundai's R&D center is an accredited test laboratory of both UL and VDE.

## Hyundai's Warranty Provisions

**20**  
YEARS

- 20-Year Product Warranty
- On materials and workmanship

**25**  
YEARS

- 25-Year Performance Warranty
- Initial year: 97.0%
- Linear warranty after second year: with 0.7%p annual degradation, 80.2% is guaranteed up to 25 years

## About Hyundai Energy Solutions

Established in 1972, Hyundai Heavy Industries Group is one of the most trusted names in the heavy industries sector and is a Fortune 500 company. As a global leader and innovator, Hyundai Heavy Industries is committed to building a future growth engine by developing and investing heavily in the field of renewable energy.

As a core energy business entity of HHI, Hyundai Energy Solutions has strong pride in providing high-quality PV products to more than 3,000 customers worldwide.

## Certification



**HYUNDAI**  
ENERGY SOLUTIONS

## Electrical Characteristics

		Mono-Crystalline Module (HiE-S____VG)		
		390	395	400
Nominal Output (P <sub>mpp</sub> )	W	390	395	400
Open Circuit Voltage (V <sub>oc</sub> )	V	46.1	46.3	46.5
Short Circuit Current (I <sub>sc</sub> )	A	10.67	10.74	10.81
Voltage at P <sub>max</sub> (V <sub>mpp</sub> )	V	37.8	38	38.2
Current at P <sub>max</sub> (I <sub>mpp</sub> )	A	10.32	10.39	10.47
Module Efficiency	%	19.9	20.2	20.4
Cell Type	-	PERC Mono-Crystalline Silicon Shingled		
Maximum System Voltage	V	1,500		
Temperature Coefficient of P <sub>max</sub>	%/°C	-0.34		
Temperature Coefficient of V <sub>oc</sub>	%/°C	-0.27		
Temperature Coefficient of I <sub>sc</sub>	%/°C	0.04		

\*All data at STC (Standard Test Conditions). Above data may be changed without prior notice.

## Mechanical Characteristics


Dimensions	1,719 × 1,140 × 35mm (L × W × H)		
Weight	22kg		
Solar Cells	340 cells, PERC Mono-crystalline Shingled (166 × 166mm)		
Output Cables	Length 1,000mm, 1×4mm <sup>2</sup>	Connector	MC4 Original
Junction Box	Rated current : 20A, IP67, TUV&UL		
Construction	Front Glass : White toughened safety glass, 3.2mm Encapsulation : EVA (Ethylene-Vinyl-Acetate)		
Frame	Anodized aluminum		

## Installation Safety Guide



- Only qualified personnel should install or perform maintenance.
- Be aware of dangerous high DC voltage.
- Do not damage or scratch the rear surface of the module.
- Do not handle or install modules when they are wet.

Nominal Operating Cell Temperature	42.3 ± 2°C
Operating Temperature	-40 ~ 85°C
Maximum System Voltage	DC 1,500 / 1,000 (IEC) DC 1,000 (UL)
Maximum Reverse Current	20A
Maximum Surface Load Capacity	Front 5,400 Pa Rear 2,400 Pa

## Module Diagram (unit : mm)

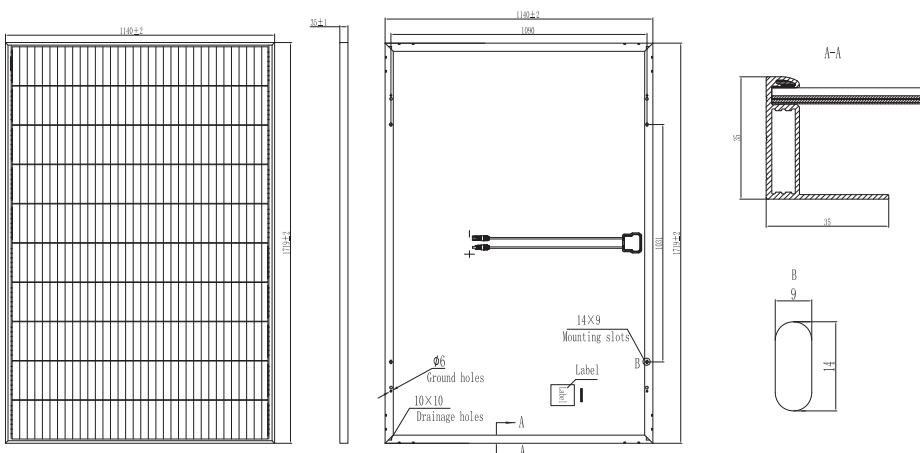

## I-V Curves



**HYUNDAI**  
ENERGY SOLUTIONS